

# HLC-1520A

- › Delivering high current pulses
- › Up to 25 years lifetime and more
- › Wide operating temperature range
- › Low self discharge

## Performance Data




(Typical values in **PulsesPlus™** batteries stored at +25 °C)

System	Lithium Intercalated Compounds
Nominal voltage	3.67 V, optional 3.9 V
Nominal capacity	140 As (39 mAh) @ 3.67 V 210 As (58 mAh) @ 3.9 V
Nominal current	25 mA
Max. continuous discharge current	500 mA
Pulse current capability	2000 mA
Max. charge voltage	3.95 V
Max. charge current	25 mA
Discharge end voltage	2.5 V
Cell impedance	max. 250 mΩ (@ 1 kHz, RT)
Lithium content	0.02 g @ 3.67 V 0.03 g @ 3.9 V
Weight	7.7 g





For more data please refer to page 37.


### HLC-1520/S

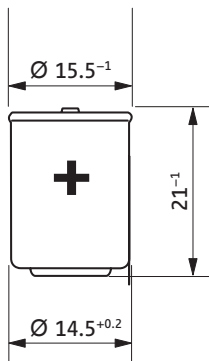

### HLC-1520/T



### HLC-1520/TP



### Available Terminations

		Catalogue No.
HLC-1520A/S	Standard	13 0 11521 02
HLC-1520A/T	Tags	13 0 11522 02
HLC-1520A/TP	Polarized tags	13 0 11527 02

**CAUTION:**  
Fire, explosion,  
and severe burn hazard.  
Do not disassemble, heat  
above 100 °C, or incinerate.  
Use as part of **PulsesPlus™**  
battery only. Do not  
charge above 3.95 V.

