


SL-861 Size: 2/3AA

> XOL – extended operating life


Performance Data

(Typical values for batteries stored at +25 °C for one year)


| | |
|-----------------------------------|--------------------------|
| System | Lithium Thionyl Chloride |
| Nominal voltage | 3.6 V |
| Nominal capacity | 1.6 Ah |
| Nominal current | 0.5 mA |
| Max. continuous discharge current | 30 mA |
| Pulse current capability | 75 mA |
| Anode surface area | 9 cm ² |
| Lithium content | 0.5 g |
| Weight | 12.5 g |
| Volume | 5.2 cm ³ |
| Temperature range | -55 °C ... +85 °C |

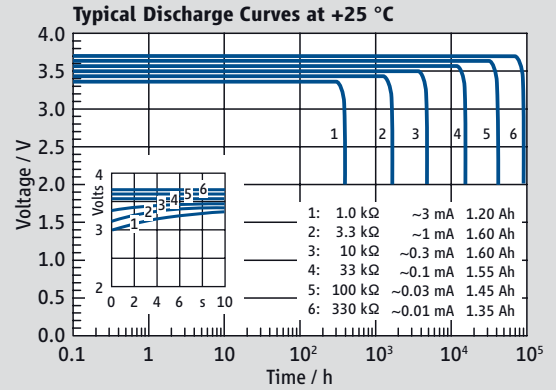


SL-861/S

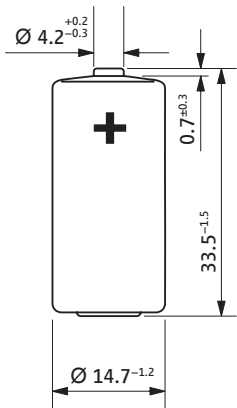


SL-861/T






SL-861/P

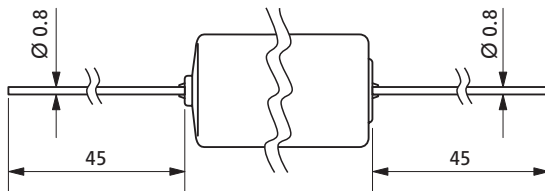

SL-861/PR



SL-861/PT

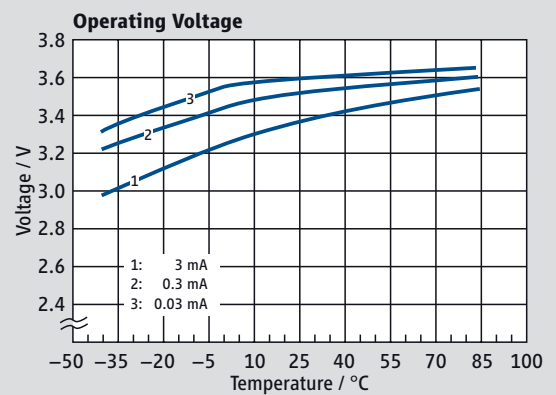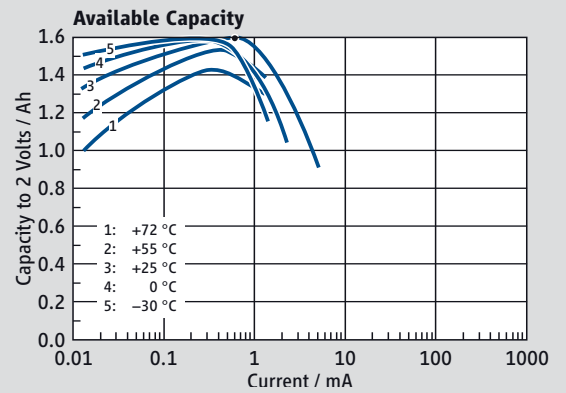

Available Terminations

| Termination | Catalogue No. | |
|-------------|----------------|---------------|
| SL-861/S | Standard | 11 1 08611 00 |
| SL-861/T | Tags | 11 1 08612 00 |
| SL-861/P | Pins | 11 1 08613 00 |
| SL-861/PR | Pins radial | 11 1 08616 00 |
| SL-861/PT | Polarized tags | 11 1 08618 00 |

WARNING:
Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 100 °C, incinerate, or expose contents to water.