



- RECHARGEABLE
- Up to 5000 cycles
- Extremely low self discharge rate
- Charging possible at extreme temperatures

TLI-1530A

Performance Data


(Typical values for batteries stored at +25 °C for one year)

System	Lithium Intercalated Compounds	
Nominal voltage	4 V	
Max. capacity	150 mAh	
Max. continuous discharge current	1 A	
Pulse current capability	2.5 A	
Discharge end voltage	2.5 V	
Max. charge voltage	4.1 V	
Max. charge current	50 mA	10 mA
Temperature range	-20 °C ... +50 °C	-40 °C ... +85 °C
Cell impedance @ 1 kHz, RT	max. 175 mΩ	
Nominal energy	max. 0.5 Wh	
Weight	10 g	


For more information please refer to page 46.




Discharge Curve at 25 °C

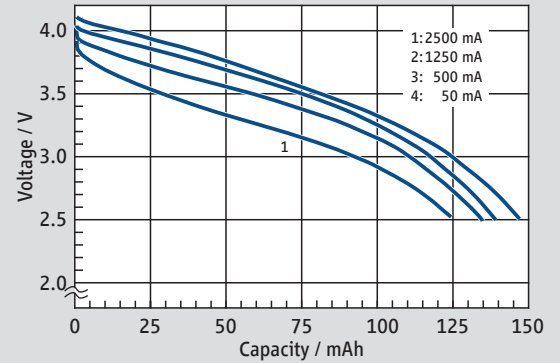


Discharge Curve at 1 A

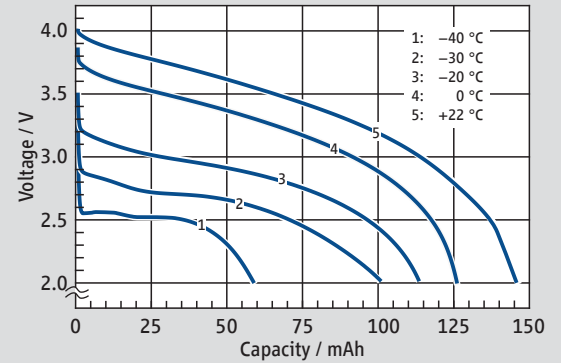


Cycling Performance

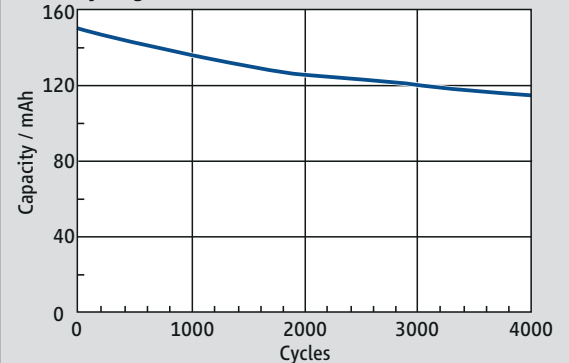


TLI-1530A/Z2

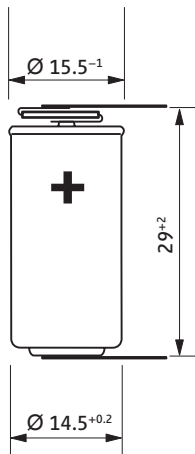

TLI-1530A/Z2/T

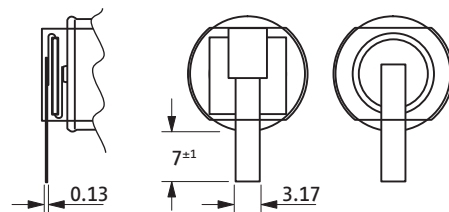

TLI-1530A/Z2/TP

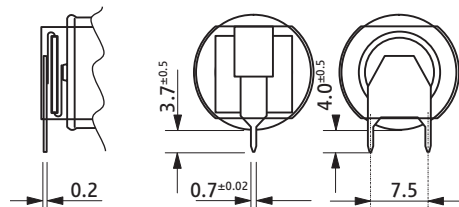

Warning:
 Fire, explosion, and severe burn hazards. Do not disassemble, heat above 100 °C, short circuit, incinerate or expose contents to water.

Do not charge above 4.1 V. Please refer to TLI-guidelines.

Available Terminations

Termination	Tags*	Catalogue No.
TLI-1530A/Z2/T	Tags*	13 3 11532 02
TLI-1530A/Z2/TP	Polarized tags*	13 3 11537 02

* with PTC SRP 200