

Rechargeable high temperature lithium-ion battery

VL 25500-125

Cylindrical, C-sized spiral cell
 Reusable up to 200 times
 in demanding >100°C environments



Benefits

- Ability to perform safely and reliably up to 125°C with severe vibration/shock constraints
- Attractive cycle life
- Easy integration within multi-cell tubular cylindrical packs
- High savings on operation costs

Key features

- Sturdy and pressure resistant stainless steel envelope
- Hermetic and corrosion-proof glass-to-metal sealing
- Redundant safety features
- Ability to withstand at 125°C 750 G peak/0.5 msec shocks
- Ability to withstand at 125°C 20 G_{RMS} random vibrations
- Ability to withstand at 125°C linear sine sweep at 30 G peak
- Non-restricted for transport

Main applications

- Oil drilling and all downhole high temperature environments
- Measure While Drilling (MWD)
- Oil and gas well monitoring
- Heat sterilizable applications

Cell size references

R14 - C

Electrical characteristics

Nominal voltage (0.4 A rate at 125°C)	3.6 V
Nominal capacity	2.0 Ah
<i>(under 0.4 A at +125°C with 2.5 V cut-off. The capacity restored by the cell varies according to current drain, temperature and cut-off)</i>	
Nominal energy	7.2 Wh
Cycle life (C/5 rate, between 2.5 and 4.1 V) - (100 % DOD)	
Original capacity still restored after 35 cycles at 125°C	75 %
Original capacity still restored after 100 cycles at 110°C	75 %
Cycle life (C/5 rate, between 2.5 and 4.1 V) - (25 % DOD)	
Original capacity still restored after 200 cycles at 125°C	75 %
Capacity retention	
after storage 1 week at 125°C (charged up to 4.0 V)	90 %
after storage 1 week at 125°C (charged up to 4.1 V)	85 %

Physical characteristics (unsleeved cells)


Diameter (max)	24.14 mm (0.951 in)
Height (max)	49.2 mm (1.937 in)
Typical weight	58.9 g (2.08 oz)
Li equivalent content	approx. 0.6 g

Operating conditions

Charge method	Constant Current/Constant Voltage
Maximum charge voltage	4.10 +/- 0.05 V
Maximum recommended charge current	0.5 A (C/4 rate) at 20°C and 1 A (C/2 rate) at 125°C
Charge temperature range	0/125°C
Maximum continuous discharge current	1 A (C/2 rate)
Pulse discharge current	1 A
Discharge temperature range	0/125°C

Consult Saft for available and customized battery packs

VL 25500-125

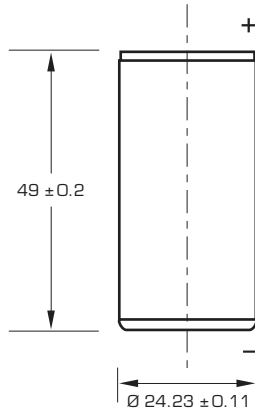

Dimensions in mm.

Shocks and vibrations

- Ability to withstand at the +25°C to 125°C range 750 G peak/ 0.5 msec repetitive shocks on axial and radial axes
(undischarged and partially discharged cells)
- Ability to withstand at the +25°C to 125°C range 20 G_{RMS} random vibrations 2 to 4 hours along X, Y and Z axis
 < 30 Hz @ ≥ 6 dB/octave
 30-80 Hz @ 3 dB/octave
 80-300 Hz @ 0 dB/octave
 300-1000 Hz @ -3 dB/octave
- Ability to withstand at the +25°C to 125°C range 1 hour of linear sine sweep at 30 G peak, from 30 to 2000 Hz along X, Y and Z axis

Saft

Specialty Battery Group

12, rue Sadi Carnot
93170 Bagnolet - France
Tel.: +33 (0)1 49 93 19 18
Fax: +33 (0)1 49 93 19 69

313, Crescent Street
Valdese, NC 28690 - USA
Tel.: +1 (828) 874 41 11
Fax: +1 (828) 879 39 81

www.saftbatteries.com


Storage

- It is recommended to maintain the storage area clean, ventilated and preferably not exceeding 30°C


Warning

- Fire, explosion and burn hazard
- Do not short circuit, crush, disassemble, heat above 125°C (257°F), incinerate, or expose contents to water

Typical discharge curve under C/5 rate (400 mA) at +125°C

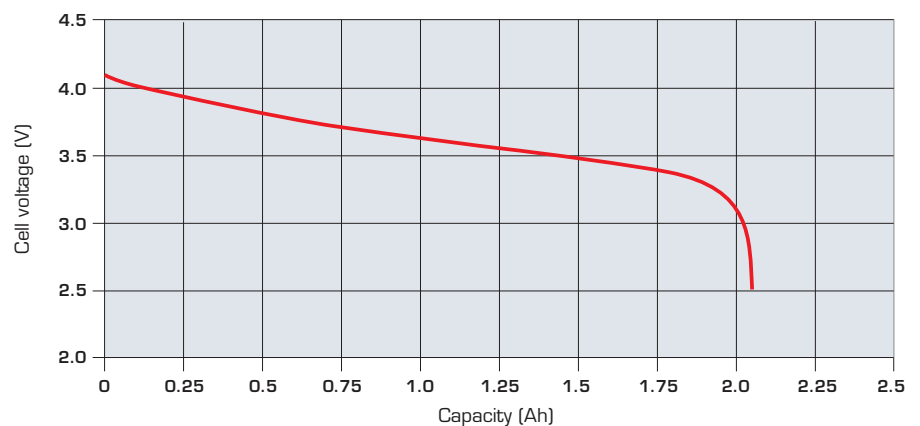

Restored capacities during cycling 2.5/4.1 V at +125°C and +110°C

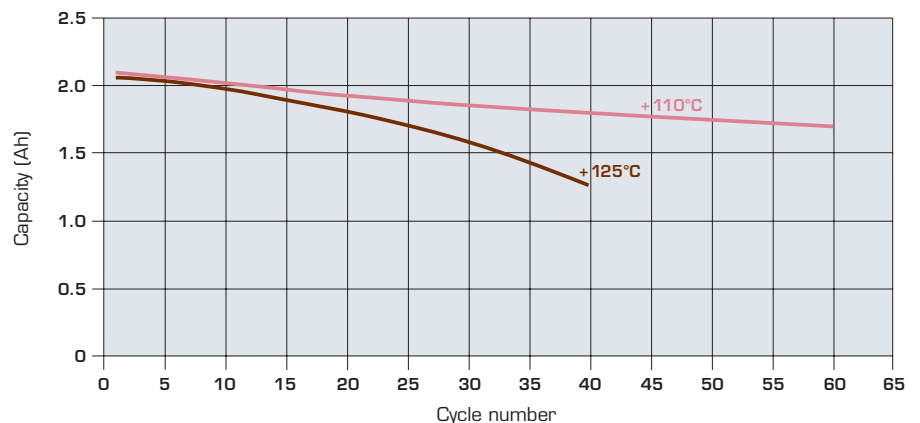

Doc. N° 54060-2-1107

Information in this document is subject to change without notice and becomes contractual only after written confirmation by Saft.

Published by the Communications Department.

Photo credit: Saft.

Société anonyme au capital de 31 944 000€
RCS Bobigny B 383 703 873

Produced by Arthur Associates.

